

DS-D5C98/PC 98-inch 4K Interactive Display



The Hikvision Interactive Flat Panel is a kind of newly developed intelligent teaching assistance product which integrates with the latest technologies of touch control, HD display, video processing, network communication, interactive control, sound control. It can be widely applied to the classroom, online teaching, training center, etc.

- UHD 4K display with resolution of 3840 × 2160.
- Anti-glare and anti-blocking design to ensure smooth interaction.
- Dual systems of Android and Windows (optional with OPS) saving cost and easy to use, video conference software are recommended to run under Windows system.
- Quick response, at most 50-point touch control and smooth writing experience.
- Built-in network switch chip saves a network switch.
- All-in-one design with tempered glass and intelligent temperature control, making it environmental-friendly and safety-guaranteed, support blue light protection.
- EDLA Certified

□ Specification

Product Model	
Product Model	DS-D5C98/PC
Display	
Screen Size	98 inch
Backlight	DLED
Pixel Pitch	0.5622 (W) × 0.5622 (H) mm
Resolution	3840 × 2160 @60 Hz
Brightness	600 cd/m ² (Typ.)
Color Depth	10 bit
Display Color	1.07 G
Response Time	5 ms
Panel Type	VA
Contrast Ratio	5000:1 (Static) 30,000:1 (Dynamic)
Color Gamut	72% NTSC (CIE1931) (Typ.)
Refresh Rate	60 Hz
Viewing Angle	178° (H)/178° (V)
Aspect Ratio	16:9
Surface Hardness	9H (Pencil)
Surface Glass	7 (Mohs)
Surface Haze	Anti-Glare Glass
Glass Bonding Method	25% Haze
Display Area	Zero Lamination
Working Duration	2158.848 mm × 1214.352 mm
Transmittance	7 × 16 H
Lifespan	88% ± 3
Touch	
Type	
Touch Point	Infrared Touch Screen Up to 50-
Touch Response Time	point multi-touch ≤ 2 ms ≥ 1.5
Minimum Touch Object	mm (≥ 90% touching area) ± 0.5
Touch Precision	mm (≥ 90% touching area)
Touch Resolution	32768 × 32768
Built-in System	
Operation System	
Memory	Android 14.0
Built-in Storage	8 GB
Processor	128 GB
GPU	Quad-core Cortex-A76 × 4 (2.4 GHz) and quad-core Cortex-A55 × 4 (1.8 GHz)
HDCP Version	Mali-G610 MC4
Internal Function	
Loudspeaker	2.3
Bluetooth	
	Built-in 2 × 20 W + 25 W loudspeaker;
	Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.1



NFC	Support screen mirroring by Android phones
Light Sensor	Yes
Interface	
Video & Audio Input	HDMI In (HDMI 2.0) × 3, VGA In × 1, DP In (DP 1.2) × 1, Audio In × 1
Video & audio output	HDMI Out (HDMI 2.0) × 1, Audio Out × 1, SPDIF Out × 1
Control interface	TOUCH-USB 3.0 × 3, RS232 × 1
Network Interface	LAN (1000 Mbps) × 2 WIFI AP & Station, 2.4G/5G WIFI 6, IEEE 802.11 a/b/g/n/ac/ax 2 × 2 MIMO (2.4 GHz and 5 GHz) authentication protocols WEP, WPA, WPA2, PSK and 802.1X EAP
Data Transmission Interface	USB 3.0 × 4, USB 2.0 × 1, Type-C × 2 (Type-C supports USB 2.0, DP 1.2, and charging functions; side charging 15 W, front charging 65 W)
Power	
Power Supply	100 to 240 VAC, 50/60 Hz
Standby Consumption	≤ 0.5 W
Average Consumption	< 325 W
Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10%~90% RH
General	
VESA	1000 mm × 400 mm (4 × M8-20 mm)
Product dimensions	2219.8 mm × 1336.4 mm × 105.7 mm
Accessory	Wall mount bracket, hook, user manual, touch writing pen, packing list, 3 M touch USB cable, 3.5 M HDMI cable (2.0), power cable , bluetooth remote control.
Package Dimensions (W × H × D)	2520 mm × 1700 mm × 330 mm
Net Weight	94 kg
Gross Weight	137 kg

□ Physical Interface



Interface	Description	Interface	Description
1.SPDIF	SPDIF interface	2.Line OUT	Audio output interface
3.Line IN	Audio input interface	4.VGA IN	Video devices connection interface
5.TYPE-C 2	Type-C interface	6.DP IN	Display input interface
7.TOUCH-USB 2	Peripheral touch interface	8.HDMI IN 2	HDMI 2 input interface
9.TOUCH-USB 1	Peripheral touch interface	10.HDMI IN 1	HDMI 1 input interface
11.USB	USB interface	12.MULTI-USB 2	Multi-functional USB interface
13.MULTI-USB 1	Multi-functional USB interface	14.HDMI OUT	HDMI output interface
15. RS 232	RS 232 interface	16. LAN 1	Network interface 1
17.LAN 2	Network interface 2	18. Power Button	Power Button
19. Power Switch	Power Switch		
A. USB	USB interface	B. USB	USB interface
C. MULTI-USB	Multi-functional USB interface	D. HDMI IN	HDMI IN interface

E. TOUCH-USB



TOUCH-USB interface

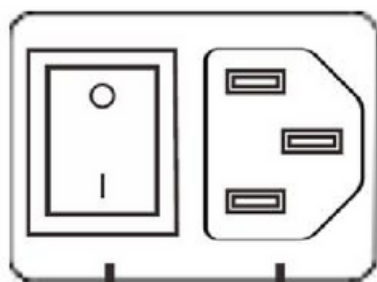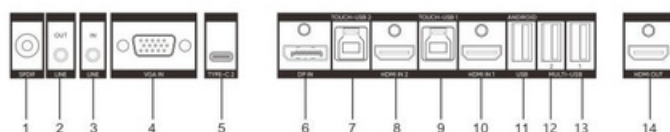

18 19

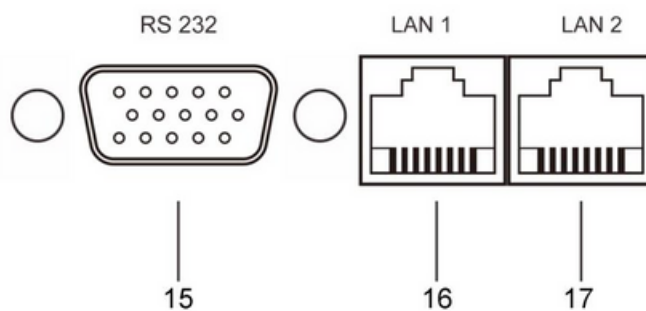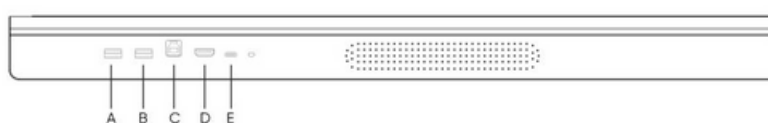

□ Installation


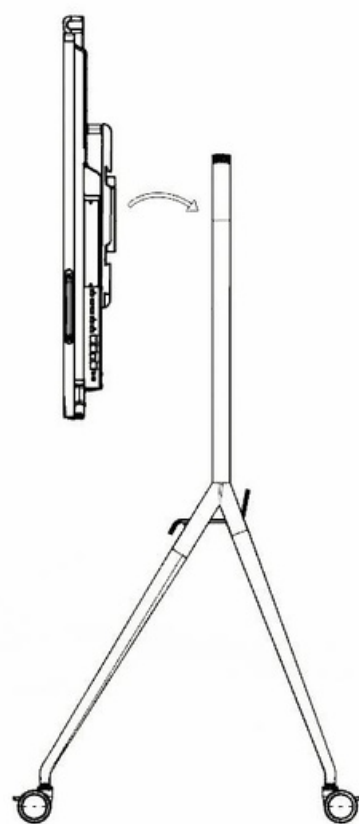
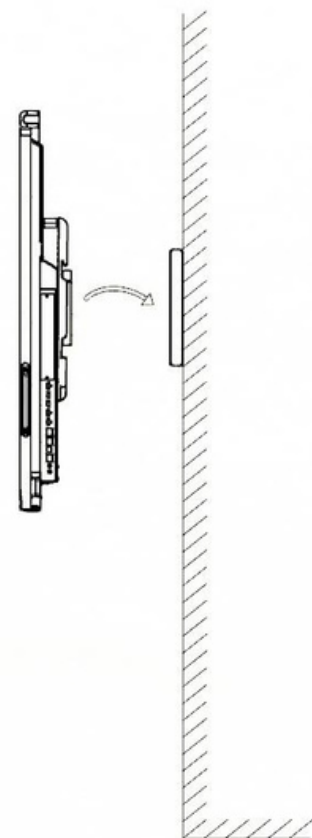


▣ Available Model

DS-D5C98/PC (EDLA)/主板套件

DS-D5C98/PC(EDLA)

▣ Dimension

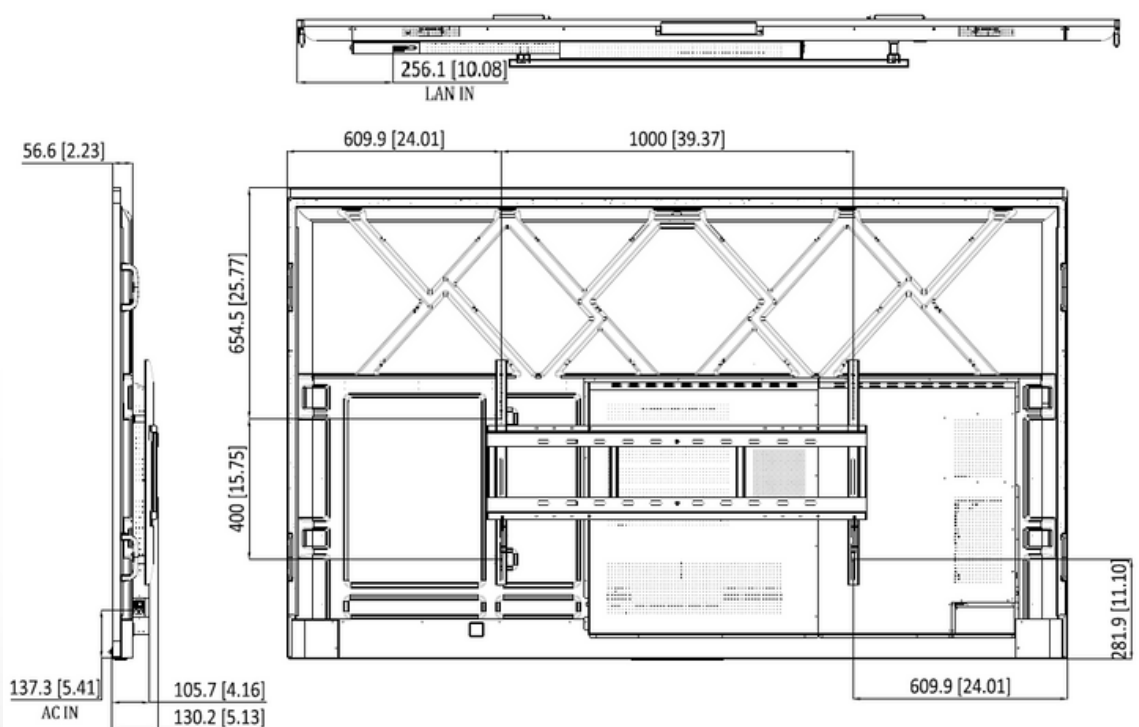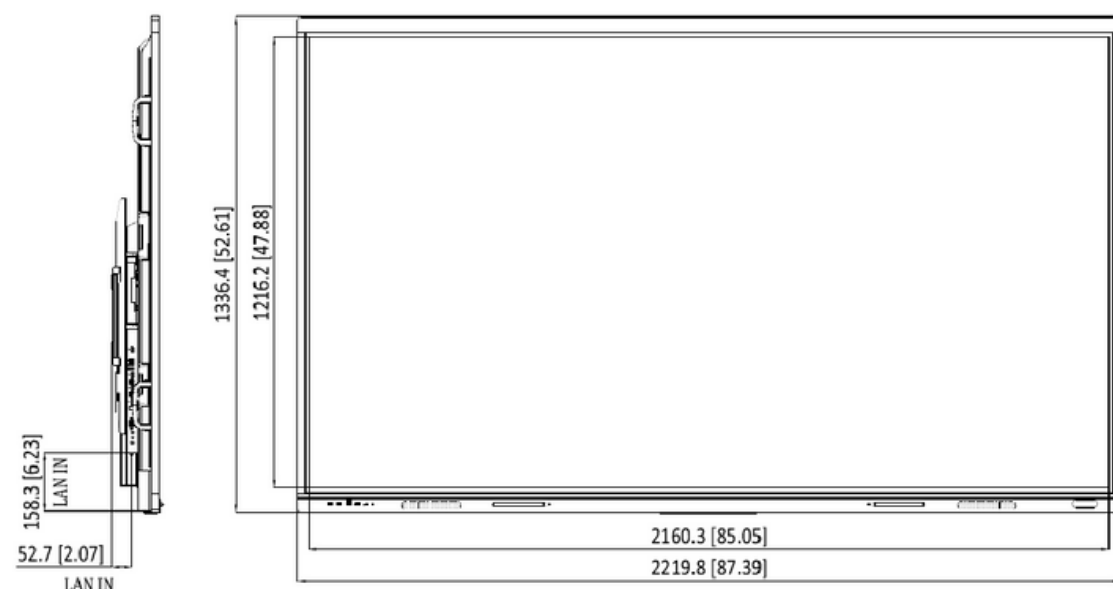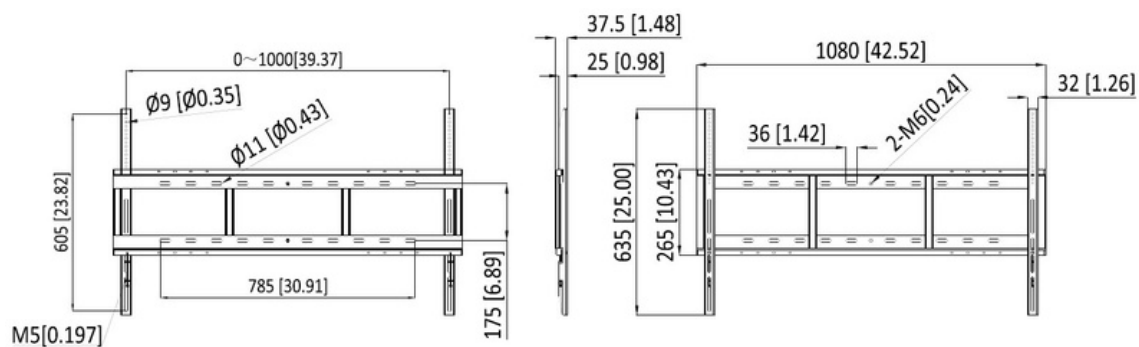

□ **Accessory**
□ **Optional**

DS-D51C08D	DS-D5AC12T7-16S5	DS-D5AC12T5-8S2	DS-D5SC3B-B	DS-D5SC3B-W
				
DS-D5ABKY2-B				
				

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®